

LevelPro® — 300S Series

Submersible Level Sensor Transmitter

LP100 Junction Box

Sold Separately



Eliminates Vapor From Entering Junction Box

Features

- ✓ Higher Accuracy: $\pm 0.5\%$
- ✓ 316 SS — Superior Chemical/Corrosion Resistance
- ✓ Teflon® Jacketed Cable
- ✓ Kalrez® (FFKM) O-Ring Seal
- ✓ Works on Foam | Vapor | Turbulence | Condensate
- ✓ No Floating

The Solution to Tough Applications Where Ultrasonic Sensors Simply DO NOT WORK!

The LevelPro® 300S continuous submersible level sensor transmitter and tank level junction box are a perfect pair for applications where ultrasonic sensors aren't going to work.

Accurately measure tank levels with this rugged combination that's simple to use and boasts superior chemical resistance along with industry exclusive features.

300S Series

316SS Sensing Diaphragm

Teflon® Jacketed Cable

(300Sxi)



Displays

The 300 Series can be easily connected to one of our many displays or to an existing PLC.

ShoPro® SP100 Series

- All in One Controller
- NEMA 4X Enclosure + Cord Grip
- Power Supply Output: 24 VDC
- Optional Audio & Visual Alarms



Sold Separately



LevelPro® — 300S Series

Submersible Level Sensor Transmitter


Specifications

Input Pressure Range	
Level ft/H ₂ O	14 20 34 54 *Consult Factory for Levels > 34 ft
Overpressure Psi	210 290
Output Signal Supply	
Output Signal	4-20mA 4-20mA + Hart 2 Wire 0.5-4.5 VDC Ratiometric 0-5 VDC RS-485 3 Wire
Power Supply	24 VDC 5VDC
Performance	
Accuracy	<±0.5% of FS
Permissible Load	Current 2-wire — $R_{max} = [(V_s - V_{smin}) / 0.02 A] \Omega$ Voltage 3-wire — $R_{min} = 10K\Omega$
Influence Effects	Supply: 0.05% Full Scale/10V Load: 0.05% Full Scale/K Ω
Long Term Stability	<± 0.1% Full Scale Over One Year
Response Time	<10 msec
Thermal Effects Offset and Span	
Thermal Drift	<± 0.02% FSO/K in Compensated Range -13°F – 178°F -25°C – 85°C
Permissible Temperatures	
Storage/Media Temperatures	-25°C – 85°C
Electrical Protection	
Short-Circuit Protection	Permanent
Reverse Polarity Protection	No Damage to Sensor
Electromagnetic Compatibility	Emission Immunity According to EN 61326
Electrical Connection	
Jacketed Cable	PTFE Teflon -40 – 180°F
3-Wire Cable with Integrated Air Tube for Reference to Atmospheric Pressure	
Materials Wetted	
Housing	316L SS
Seal	Welded 316L SS
Diaphragm	316L SS
General	
Current Consumption	Max. 25mA
Weight Grams	316 SS 875g
Ingress Protection	IP 68 NEMA 4X
CE-Conformity	EMC Directive: 2004 108 EC
Certification (300Sxi model)	Atex Rated

*Contact Factory for different options

Wiring

24VDC	Color
Supply +	Red
Supply -	Black

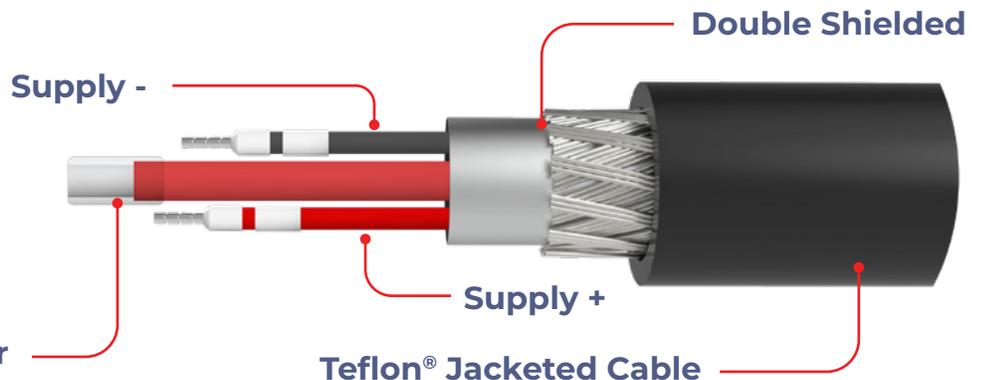

Capillary with Gortex® Breather

Teflon® Jacketed Cable

LevelPro® — 300S Series

Submersible Level Sensor Transmitter

Model Selection

300S Submersible Level Sensor


- High Accuracy: ±0.5%
- Teflon® Jacketed Cable
- FFKM Kalrez® O-ring
- 316 SS Sensing Diaphragm
- Excellent for:
Foam | Vapor | Condensate | Turbulence



300S Submersible Level Sensor			
Size	Part Number	Output	
0-34ft 11m	300S-1010-A-11	4-20mA	
0-34ft 11m	300S-1010-R-11	Ratiometric	
0-34ft 11m	300S-1010-V-11	Voltage	
0-34ft 11m	300S-1010-RS-11	RS485	
0-34ft 11m	300Sxi-1010-A-11	4-20mA	
0-34ft 11m	300Sxi-1010-R-11	Ratiometric	
0-34ft 11m	300Sxi-1010-V-11	Voltage	
0-34ft 11m	300Sxi-1010-RS-11	RS485	



300Sxi-1001-A-11
(xi = Explosion Proof)

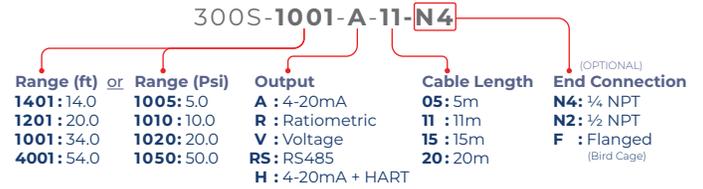

Frequently Ordered With:

LP100

LevelPro LP100 Series Junction Box, PP Material, Viton VaporBloc®, NEMA 4X, 2" NPT Connection, Cortex® Breather



SP100

LevelPro ShoPro Series LED Display & Controller, 4-20mA Input, NEMA 4X Enclosure, Wall Mount, 120VAC

