



# RH TT ROOM

## Relative Humidity (RH), Temperature Transmitter (TT)

The ACI Relative Humidity with Temperature Transmitter Room Series utilizes a thermoset polymer capacitive sensing element with a factory applied hygroscopic filter to deliver a proportional analog current or voltage output signal. The hygroscopic filter provides added resistance to moisture, dust, and other chemicals for greater long term reliability. The RH Room transmitter features integral DIP switches for field selection of the proper output signal and supply voltage to meet your applications requirements. Each unit also contains 0%, 50%, and 100% test options to verify that the transmitter is both working and wired properly. Field calibration can be performed by using the increment and decrement calibration DIP switches without the need to replace the sensing element. These enhancements provide increased flexibility and outstanding long-term reliability. The temperature transmitter must be powered with 13.5 to 24 VDC power source and can be ordered as either a two-wire 4-20 mA or 3-wire

voltage output sensor. The temperature transmitter is installed on the back of the enclosure and must be mounted over a single gang junction box in the wall. There are two styling options in this series which should satisfy most commercial decors. Both styles feature four-way airflow to minimize self-heating. NIST Calibration Certificates are available for all RH TTM part series.

**Applications:** Monitor Room RH Levels, Humidification, Dehumidification, Hospitals, Clean Rooms, Office Buildings, Schools, Museums, Process Control, ESD (Anti-Static) Control, Data Centers


**The ACI RH TT Room is covered by ACI's Five (5) Year Limited Warranty. The warranty can be found in the front of ACI's Sensors & Transmitters catalog, as well as on ACI's website, [www.workaci.com](http://www.workaci.com).**

### PRODUCT SPECIFICATIONS

<b>RH Supply Voltage (Reverse Polarity Protected):</b>	<b>4-20 mA:</b> 250 Ohm Load: 15 - 40 VDC / 18 - 28 VAC   <b>500 Ohm Load:</b> 18 - 40 VDC / 18 - 28 VAC
<b>RH Supply Current (VA):</b>	<b>0-5 VDC:</b> 12 - 40 VDC / 18 - 28 VAC   <b>0-10 VDC:</b> 18 - 40 VDC / 18 - 28 VAC
<b>RH Output Load Resistance:</b>	<b>Voltage Output:</b> 8 mA maximum (0.32 VA)   <b>Current Output:</b> 24 mA maximum (0.83 VA)
<b>RH Output Signal:</b>	<b>4-20 mA:</b> 700 Ohms maximum   <b>0-5 VDC or 0-10 VDC:</b> 4K Ohms Minimum
<b>RH Accuracy @ 77°F (25°C):</b>	<b>2-wire:</b> 4 - 20 mA (Factory Default)   <b>3-wire:</b> 0-5 or 0-10 VDC and 4 - 20 mA (Field Selectable)
<b>RH Measurement Range:</b>	+/- 1% over 20% RH Range between 20 to 90%   +/- 2%, 3%, or 5% from 10 to 95%
<b>Operating RH Range:</b>	0-100%
<b>Operating Temperature Range:</b>	0 to 95% RH, non-condensing
<b>Storage Temperature Range:</b>	35 to 122°F (1.5 to 60°C)
<b>RH Stability   Repeatability   Sensitivity:</b>	-40 to 149°F (-40 to 65°C)
<b>RH Response Time (T63):</b>	Less than 2% drift / 5 years   0.5% RH   0.1% RH
<b>RH Sensor Type:</b>	20 Seconds Typical
<b>RH Transmitter Stabilization Time:</b>	Capacitive with Hydrophobic Filter
<b>RH Connections   Wire Size:</b>	30 Minutes (Recommended time before doing accuracy verification)
<b>RH Terminal Block Torque Rating:</b>	Screw Terminal Blocks (Polarity Sensitive)   16 (1.31 mm <sup>2</sup> ) to 26 AWG (0.129 mm <sup>2</sup> )
<b>RH NIST Test Points:</b>	4.43 to 5.31 lb-in (0.5 to 0.6 Nm)
<b>TT Supply Voltage   Supply Current:</b>	<b>Default Test Points:</b> 3 Points (20%, 50% & 80%) or 5 Points (20%, 35%, 50%, 65% & 80%) <b>1% NIST Test Points:</b> 5 Points within selected 20% Range (ie. 30%-50% are 30, 35, 40, 45 & 50)
<b>TT Maximum Load Resistance:</b>	+8.5 to 32 VDC (Reverse Polarity Protected)   25 mA minimum
<b>TT Output Signals:</b>	<b>250 Ohm Load:</b> +13.5 to 32 VDC   <b>500 Ohm Load:</b> +18.5 to 32 VDC
<b>TT Calibrated Accuracy   Linearity<sup>1</sup>:</b>	(Terminal Voltage - 8.5 V)   0.020 A
<b>TT Temperature Drift<sup>2</sup>:</b>	<b>Current Output:</b> 4-20 mA (2-Wire Loop Powered)   <b>Voltage Output:</b> 1-5 VDC or 2-10 VDC (3-Wire)
<b>TTM100/TTM1K Certification Points:</b>	Temperature Spans < 500°F (260°C): +/- 0.2%   Temperature Spans > 500°F (260°C): +/- 0.5%
<b>TT Warm Up Time   Warm Up Drift:</b>	Temperature Spans < 100°F (38°C): +/- 0.04%/°F   Temperature Spans > 100°F (38°C): +/- 0.02%/°F
<b>TT Operating Temperature/RH Range:</b>	<b>3 Point NIST:</b> 20%, 50%, 80% of span   <b>5 Point NIST:</b> 20%, 35%, 50%, 65%, 80% of span
<b>Platinum RTD (PTC) Number Wires   Wire Colors:</b>	10 Minutes   +/- 0.1%
<b>Platinum RTD Sensor Output @ 32°F (0°C):</b>	-40 to 185°F (-40 to 85°C)   0 to 90% RH, non-condensing
<b>Platinum RTD Tolerance Class   Accuracy:</b>	Two   <b>A/TT100 Series:</b> Brown/Brown   <b>A/TT1K/TTM1K Series:</b> Black/Black
<b>Platinum RTD Sensor Stability:</b>	<b>A/TT100 Series:</b> 100 Ohms Nominal   <b>A/TT1K/TTM1K Series:</b> 1000 Ohms Nominal
<b>Platinum RTD Response Time (63% Step Change):</b>	+/- 0.06% Class A   <b>Tolerance Formula:</b> +/- °C = (0.15°C + (0.002 *  t )) where  t  is the absolute value of Temperature above or below 0°C in °C
<b>Enclosure Material (Color):</b>	+/-0.03% after 1000 Hours @ 572°F (300°C)
<b>Enclosure Flammability Rating:</b>	8 Seconds nominal
<b>Product Dimensions (L x W x D):</b>	<b>"-R2" Enclosure:</b> ABS (White)   <b>"-R" Enclosure:</b> ABS (Beige)
<b>Product Weight:</b>	UL94-HB
<b>Agency Approvals:</b>	<b>"-R2" Enclosure:</b> 4.50" (114.3 mm) x 2.75" (69.85 mm) x 1.12" (28.45 mm) <b>"-R" Enclosure:</b> 4.50" (114.3 mm) x 2.75" (69.85 mm) x 1.12" (28.45 mm)
	<b>A/RHx-TT-R2 Series:</b> 0.21 lbs. (0.096 kg)   <b>A/RHx-TT-R Series:</b> 0.21 lbs. (0.096 kg)

**Note 1:** A Transmitter is calibrated at 71°F (22°C) Nominal | **Note 2:** Temperature Drift is referenced to 71°F nominal calibration temperature



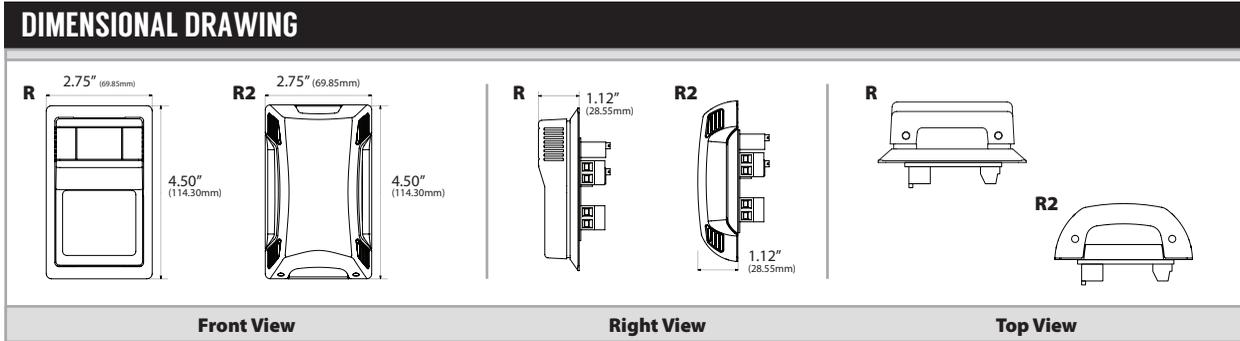

CUSTOM ORDERING		Model # Example: <span style="font-size: small;">A/ RH1 TT100 R2 2 0-100°F</span>	MODEL #
<b>A. Sensor Series</b> <i>No Selection Required</i>	A/ <span style="font-size: small;">A. B. C. D. E. F.</span> <span style="font-size: x-small;">→</span>		A/
<b>B. Accuracy</b> <i>Select One (1)</i>	RH1 = +/-1%** (Specify a 20% Range between 20 to 90% RH) RH2 = +/-2%   RH3 = +/-3%   RH5 = +/-5%		
<b>C. Model Series</b> <i>Select One (1)</i>	TT100 = 100 Ohms   TT1K = 1K Ohms   TTM1K = Matched 1K Ohms (Specify 3 or 5 Point NIST)		
<b>D. Configuration</b> <i>Select One (1)</i>	R = Room   R2 = Room		
<b>E. Transmitter Output</b> <i>Select One (1)</i>	4 = 4 to 20 mA   1 = 1 to 5 VDC*   2 = 2 to 10 VDC*		
<b>F. Calibrated Span</b>	Specify Span in °F or °C (Best Accuracy in 100°F Increments)		

Note\*: A Temperature Transmitter Output of 1-5 VDC or 2-10 VDC would have a RH Output of 0-5 VDC or 0-10 VDC | Note\*\*: Not available with TTM1K

ACCESSORIES ORDERING			Model # Example: <span style="font-size: small;">A/MOUNTING PLATE BEIGE R -OR- 106821</span>
Model #	Item #	Description	
A/MOUNTING PLATE BEIGE R	106821	Wall Mounting Back Plate, Plastic, Beige ("R")	
A/MOUNTING PLATE WHITE R2	143369	Wall Mounting Back Plate, Plastic, White ("R2")	
LOCKING COVER	107370	Clear Thermostat Guard, Locking Cover, Low Profile	
A/ROOM-FOAM-PAD	125690	1/8" Foam Insulation Pad with Adhesive (3" x 2", Black)	

ACCESSORIES ORDERING (NIST)		Model # Example: <span style="font-size: small;">NIST RH CERT</span>
Model #	Description	
---- (Default)	TTM Calibration Certificate (3 Point NIST)	
NIST TTM CERT - 5PT.	TTM Calibration Certificate (5 Point NIST)	
NIST RH CERT	TTM Calibration Certificate (Specify 3 Point or 5 Point NIST)	

Note: When ordering NIST certificates, please add an additional line item under the corresponding A/RHx-TTMxx-R/R2 Model Number

